



MANUFACTURERS
"AFC" LOGO
.025 MAX
RAISED OR INDENTED



"X" ALLOY STEEL
GRADE MARK

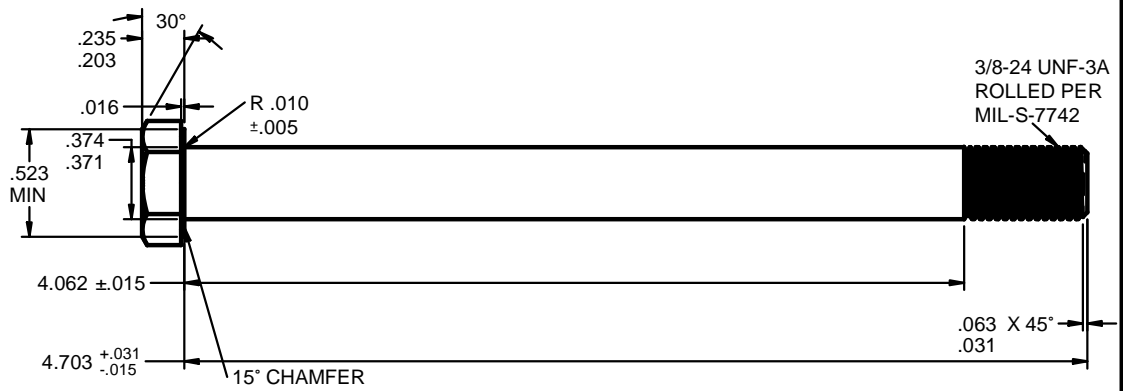

SCALE: 1X

DESIGN NOTES: AN6-45A AIRFRAME BOLT

1. LENGTH 4-45/64" (4.703"), GRIP 4-1/16" (4.062"), THREAD 3/8-24 UNF-3A.
2. PROCUREMENT SPECIFICATION NASM6812.
3. MATERIAL ALLOY STEEL PER PROCUREMENT SPECIFICATION.
UNS G40370 AMS6300 DFAR EXEMPT
UNS G87400 AMS6322 DFAR APPLIES
UNS G41400 AMS6382 DFAR APPLIES
UNS G41300 AMS-S-6758 DFAR APPLIES
4. HEAT TREAT AMS-2759 HRC 26-32.
5. FINISH CADMIUM PLATED PER AMS-QQ-P-416, TYPE 2 (YELLOW), CLASS 2.
6. THREADS 3/8-24 UNF-3A ROLLED PROCESS PER MIL-S-7742.
7. TENSILE 10,100 LBS. [44,927 N] MIN.
8. YIELD 7,740 LBS. [34,429 N] MIN.
9. SINGLE SHEAR 8,280 LBS. [36,831 N] MIN. SHORT LENGTH N/A.



EXAMPLE PART NUMBER

ACTUAL SIZE

AFC 6-45 C2 CADMIUM TYPE 2 YELLOW PLATING
AFC 6-45 C1 CADMIUM TYPE 1 PLAIN WHITE PLATING
AFC 6-45 TDC THERMAL DIFFUSION COATED ASTM A1059

↑ FINISH
↑ LENGTH 4.703"
↑ BODY SIZE & THREAD .375-24 UNF-3A
↑ MANUFACTURER AIRFASCO

UNCONTROLLED

CONFORMS TO: NASM3 THRU NASM20
PART NUMBER: AN6-45A

| | | | | |
|---|--|--|---|-----|
| DIMENSIONS ARE IN INCHES AND TOLERANCES ARE AS SHOWN BELOW. DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI Y14.5M-1982 | PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS PENDING. UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS DRAWING IS STRICTLY PROHIBITED. | | AIRFASCO.com 2655 HARRISON AVE SW, CANTON, OHIO 44706 USA | |
| | APPROVALS DRAWN M.B. DATE 3/21/2014 CHECKED T.W. DATE 3/21/2014 ENG APPR B.E. DATE 3/21/2014 MGR APPR D.D. DATE 3/21/2014 | | PART NUMBER: AN6-45A_AFC6-45C2 | REV |
| ANGLES ±5° .XX ±.03" .XXX ±.010" .XXXX ±.001" | SIZE A MATERIAL: 4037 / 8740 OR AS NOTED | | EST. WEIGHT: .159 / EACH LBS. [72.3 g] | |
| SCALE: 1X | | DRAWING NUMBER: AN6-45A_AFC6-45C2 SHEET 1 OF 1 | | |